

R36

AWUS036H & 3G Modem Router

AWUS036H Extender



Features

- **High Speed Data Rates**
Providing faster data rates of up to 150Mbps and is compatible with legacy 802.11b/g equipment
- **Advanced Robust Security**
Firewall with SPI to protect the internal host from hacker attacks. Wireless security is comprehensive and included WPA/WPA2 PSK
- **Feature Rich**
WDS, Dual SSIDs, Static Routing, QoS and more

AWUS036H Extender Diagram




R36

AWUS036H & 3G Modem Router



3G Mobile Function Diagram

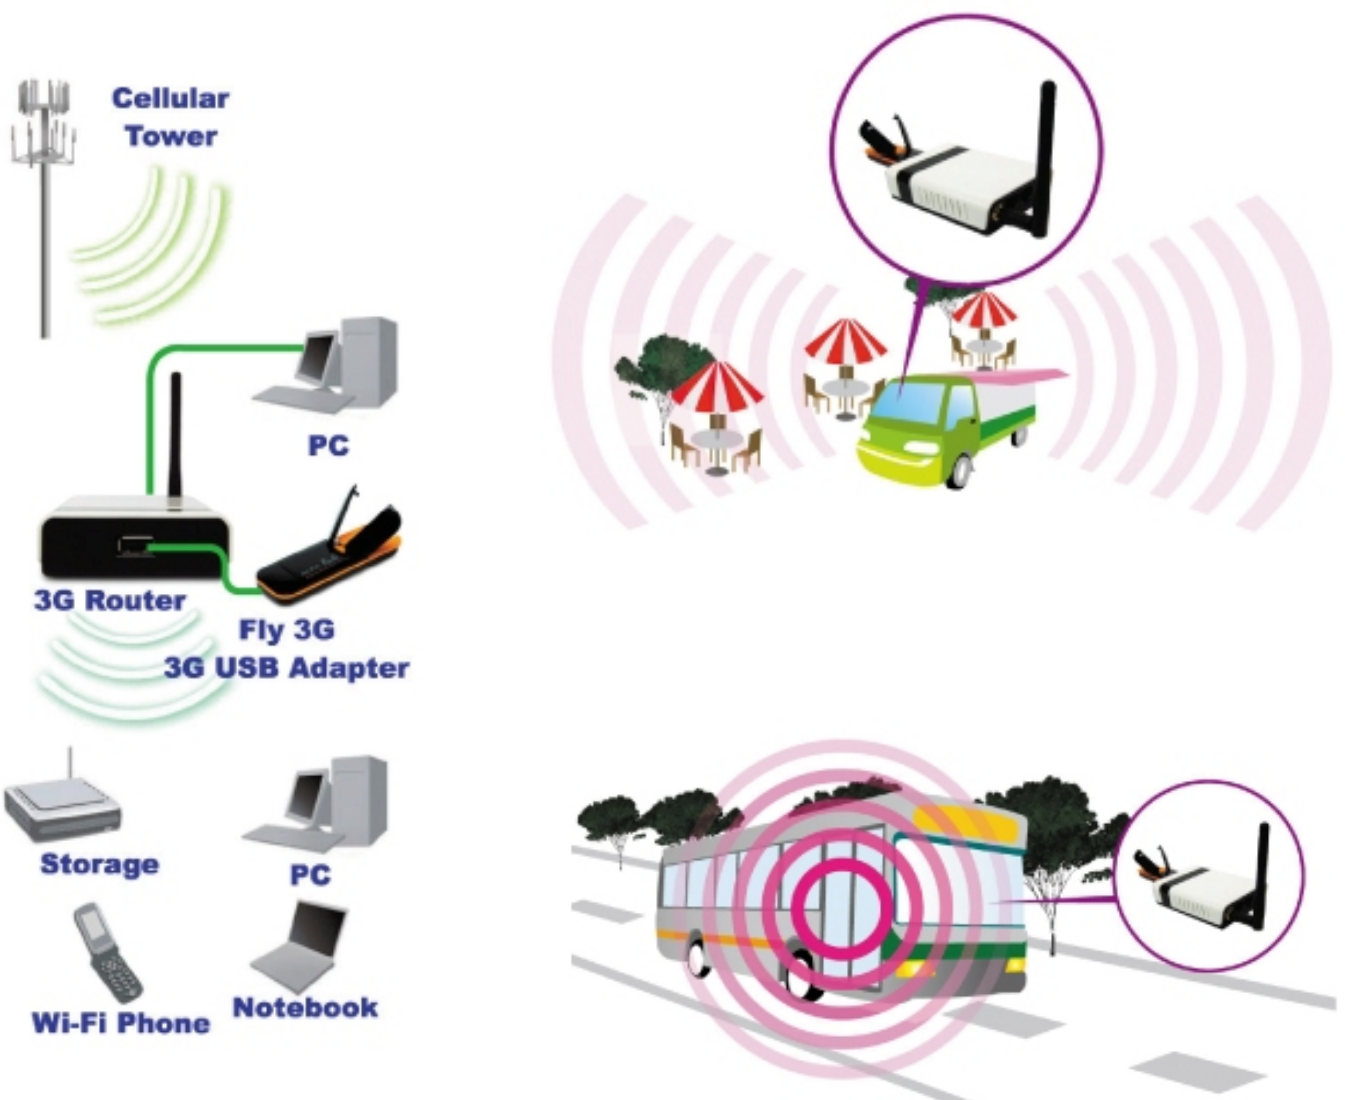

R36

AWUS036H & 3G Modem Router

Specifications

Standards	Wired: IEEE 802.3 (10Base-T) IEEE 802.3u (100Base-TX) Wireless: IEEE 802.11, IEEE 802.11g, IEEE 802.11n															
Physical	1 x 10/100Mbps WAN Port 1 x 10/100Mbps LAN Port 1 x detachable external 5dBi antenna 1 x Reset button 1 x WPS Security Key 1 x USB Port															
Management	Web-base management interface Remote management SNTP time synchronize															
Output Power	802.11b: 27dBm \pm 2dBm 802.11g: 25dBm \pm 2dBm 802.11n: 25dBm \pm 2dBm															
Sensitivity	<table border="1"><tr><td rowspan="2">11n</td><td>20MHz</td><td>MCS7: -71</td><td>MCS0: -90</td></tr><tr><td>40MHz</td><td>MCS7: -69</td><td>MCS0: -88</td></tr><tr><td>11g</td><td>54Mbps: -75</td><td>6Mbps: -92</td><td></td></tr><tr><td>11b</td><td>11Mbps: -90</td><td>1Mbps: -95</td><td></td></tr></table>	11n	20MHz	MCS7: -71	MCS0: -90	40MHz	MCS7: -69	MCS0: -88	11g	54Mbps: -75	6Mbps: -92		11b	11Mbps: -90	1Mbps: -95	
11n	20MHz		MCS7: -71	MCS0: -90												
	40MHz	MCS7: -69	MCS0: -88													
11g	54Mbps: -75	6Mbps: -92														
11b	11Mbps: -90	1Mbps: -95														
Data Rate	802.11n (40MHz): up to 150Mbps 802.11n (20MHz): up to 72Mbps 802.11g: 54,48,36,24,18,12,9,6Mbps 802.11b: 11,5.5,2,1Mbps															
Wireless Mode	WISP Bridge Router															
Operating Frequency	FCC: 2412~2462MHz (Ch1~Ch11) ETSI: 2412~2472MHz (Ch1~Ch13) Japan: 2412~2484MHz (Ch1~Ch14)															
Security	Access Control Policy MAC filter DMZ Host SSID Broadcast disable Wireless MAC address Filtering WEP Encryption WPA-/W PA2-PSK (Pre-shared Key) WPA/W PA2 Enterprise mode (802.1x) WiFi Protected Setup (WPS)															
Router	Shares high speed cable/xDSL Internet connection Static Routing VPN Pass through NAT 802.11e WMM IGMP Proxy Dual SSIDs															
Temperature	Operating: 0°C to 40°C (32°F to 104°F) Storage: -20°C to 60°C (-4°F to 140°F)															
Humidity	Operating :10% to 85% Non-Condensing Storage: 5% to 90% Non-Condensing															
Dimensions	93 x 70 x 26mm															
Weight	74g															
Power Input	12V/1A															

For further details:

Alfa Network Inc.,
4F-1 No. 106, Rueiguang Rd.,
Neihu District,
Taipei City, Taiwan.
<http://www.alfa.com.tw>
sales@alfa.com.tw

R36

AWUS036H & 3G Modem Router

3G Functions	3G budget Control with Email warning (Support Pre-pay and Post-pay) Dual Wan backup Remote Access Control by 3G WAN
Compatible 3G USB Modem	ALFA Fly3G ZTE MF622 ZTE MF626 ZTE MF627 ZTE MF628 ZTE MG880 ZTE AC8710v2 ZTE AC2726 ZTE AC8710v1 Huawei E180 Huawei E219 Huawei E160E Huawei E220 Huawei E219 Huawei E169 Huawei E169u Huawei D02 Huawei D21 Huawei D22 Huawei D23 Huawei D31 Huawei ET128 Bandluxe C170 DoCoMo A2502 SoftBank C01LC Sony Erission MD300 ASUA T500 Sierra 598U (EVDO) C-MOTECH U300 (EVDO)

For further details:

Alfa Network Inc.,
4F-1 No. 106, Rueiguang Rd.,
Neihu District,
Taipei City, Taiwan.
<http://www.alfa.com.tw>
sales@alfa.com.tw