


## Quick Installation Guide

300Mbps Wireless N Router

MODEL NO. TL-WR841N/TL-WR841ND


### Package Contents

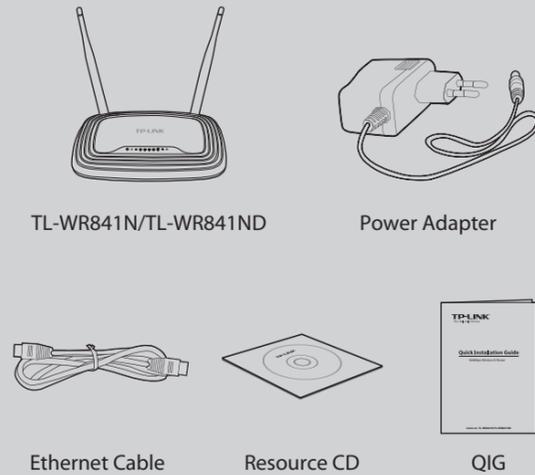

### System Requirement

· Windows 7 · Windows Vista · Windows XP · Windows 2000

## 1 Hardware Connection

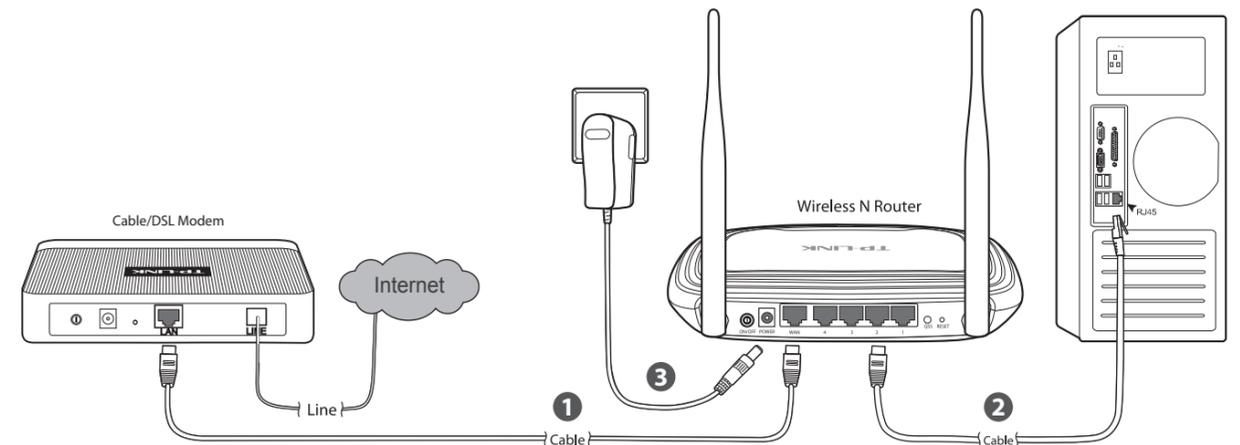


- 1 Connect the **WAN** port on your Router to the Modem's **LAN** port with an Ethernet cable.
- 2 Connect your computer to any Port labeled 1~4 on the Router with an Ethernet cable.
- 3 Plug the provided Power Adapter into the Power jack on the back of the Router and the other end to a standard electrical Wall socket. Press the **ON/OFF** button to power on the Router.

## 2 Connecting by Easy Setup Assistant



The Easy Setup Assistant is not supported in Linux or Mac OS. If you are running without CD-ROM, Please refer to **Appendix 1**.

- 1 Insert the TP-LINK resource CD into the CD-ROM drive.

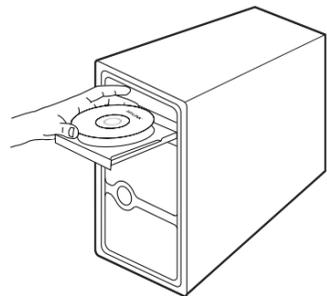


- 2 Here we take TL-WR841ND for example. Select **TL-WR841ND** and click **Easy Setup Assistant**.



- 3 After confirming the hardware connection and the status of LEDs, Click **NEXT** to continue.



- 4 After the connectivity is checked successfully, please click **NEXT**.

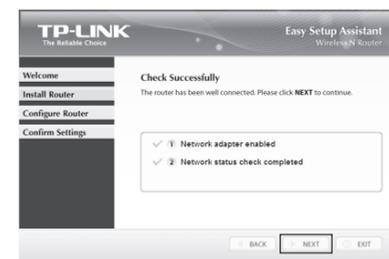

- 5 Select the connection type your ISP provides and click **NEXT**. Here we take **PPPoE** connection for example.



- 6 Enter the **User Name** and **Password** provided by you ISP and click **NEXT**.



- 7 Create a unique or easy-to-remember name for your wireless network. You can also keep the default setting. Click **NEXT** to continue.




- 8 You are recommended to select **Most Security (WPA2-PSK)** to secure your wireless network. Enter a key of 8 ~ 63 characters and click **NEXT**.



(Turn over)

## 2 Connecting by Easy Setup Assistant (continued)

9 After confirming the configuration, click **NEXT** to continue.

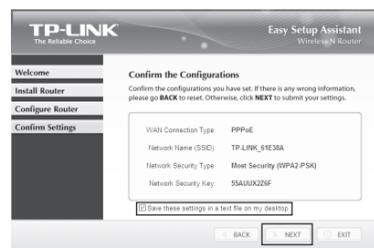


**Note** You can save these settings in a text file on your desktop. If you forget the Network Security Key, you can check the **Router Settings.txt**.

10 After the configuration is completed successfully, please click **NEXT**.



11 Click **FINISH** to close the wizard.

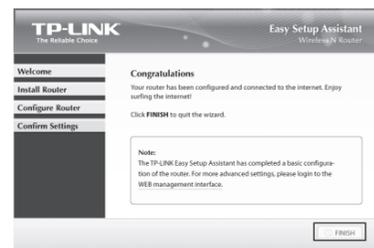

**Note** You can click **WEB management interface** for more advanced settings.

12 The basic settings for your Router are completed. You can go to <http://www.tp-link.com> to verify the Internet connection.



## Appendix 1: Connecting by WEB Management Interface

You can go to WEB management interface to configure your Router.

1) Set the IP address of your wired network adapter as **Automatically**.


### For Windows 7/Vista

Go to **Start > Settings > Control Panel**. Click **View network status and tasks > View status > Properties** and double-click. Right-click **Local Area Connection**, select **Properties** and then double-click **Internet Protocol Version 4 (TCP/IPv4)**. Select **Obtain an IP address automatically**, choose **Obtain DNS server address automatically** and click **OK**.

### For Windows XP/2000

Go to **Start > Control Panel**. Click **Network and Internet Connections > Network Connections**. Right-click **Local Area Connection**, select **Properties** and then double-click **Internet Protocol (TCP/IP)**. Select **Obtain an IP address automatically**, choose **Obtain DNS server address automatically** and click **OK**.

- 2) Open your browser and type <http://tplinklogin.net> in the address field, then use the user name **admin** and password **admin** to login.
- 3) Go to **Quick Setup** and click **Next**. Select **Auto-Detect** to detect Internet connection type and click **Next**.

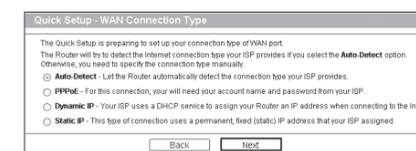

4) Here we take **PPPoE** for example. Enter the **Username** and **Password** provided by your ISP and click **Next**.



5) Configure your network name (SSID) and the wireless network security. Click **Next** to continue.




6) Click **Finish** or **Reboot** to make your settings effective.

## Appendix 2: Troubleshooting


### How do I restore my Router's configuration to its factory default settings?

With the Router powered on, press and hold the **RESET** button on the rear panel for 8 to 10 seconds using a pin before releasing it.

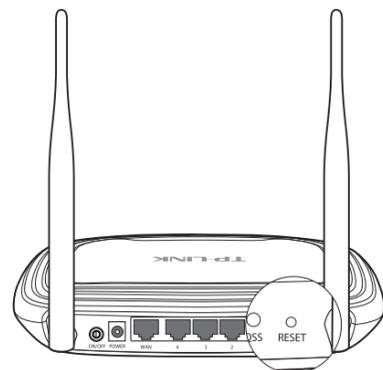

### What can I do if I cannot access the Internet?

- 1) Check to see if all the connectors are connected well, including the telephone line (for your modem), Ethernet cables and power adapter.
- 2) Check to see if you can access the Router's web management page. If you can, please follow the following steps to solve the problem. If you can't, please refer to **Appendix 1**.
- 3) Make sure that you are connected to the TP-LINK Router with the computer that was originally connected to your modem, then log on to the web-based management page and browse to **'Network > MAC Clone'**, click **'Clone MAC Address'** and then click **'Save'**. Reboot the Router and try to access the Internet from your computer. If the problem persists, please go to the next step.

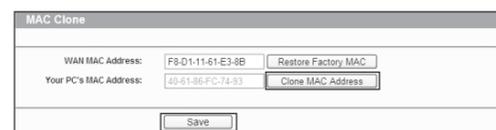

4) Please feel free to contact our Technical Support if the problem persists.

### What can I do if I forget my password?

- 1) Restore the Router's configuration to its factory default settings. If you don't know how to do that, please refer to **How do I restore my Router's configuration to its factory default settings?**
- 2) Use the default user name and password: **admin, admin**.
- 3) Try to configure your router once again by following the instructions in the previous steps of the QIG.

**Note** You can refer to our User Guide on the CD to set up more functions of the Router.

## Technical Support

- For more troubleshooting help, go to [www.tp-link.com/support/faq.asp](http://www.tp-link.com/support/faq.asp)
- To download the latest Firmware, Driver, Utility and User Guide, go to [www.tp-link.com/support/download.asp](http://www.tp-link.com/support/download.asp)
- For all other technical support, please contact us by using the following details:

**Global**  
Tel: +86 755 26504400  
E-mail: [support@tp-link.com](mailto:support@tp-link.com)  
Service time: 24hrs, 7 days a week

**Singapore**  
Tel: +65 62840493  
E-mail: [support.sg@tp-link.com](mailto:support.sg@tp-link.com)  
Service time: 24hrs, 7 days a week

**UK**  
Tel: +44 (0) 845 147 0017  
E-mail: [support.uk@tp-link.com](mailto:support.uk@tp-link.com)  
Service time: 24hrs, 7days a week

**USA/Canada**  
Toll Free: +1 866 225 8139  
E-mail: [support.usa@tp-link.com](mailto:support.usa@tp-link.com)  
Service time: 24hrs, 7days a week

**Malaysia**  
Tel: 1300 88 875465 (1300 88TPLINK)  
E-mail: [support.my@tp-link.com](mailto:support.my@tp-link.com)  
Service time: 24hrs, 7days a week

**Russian Federation**  
Tel: 8 (495) 223-55-60  
8 (800) 250-55-60 (toll-free call from any RF region)  
E-mail: [support.ru@tp-link.com](mailto:support.ru@tp-link.com)  
Service time: From 10:00 to 18:00 (Moscow time)

\*Except weekends and holidays in Russian Federation

**Germany / Austria**  
Tel: +49 1805 875465 (German Service)  
+49 1805 TPLINK  
E-mail: [support.de@tp-link.com](mailto:support.de@tp-link.com)

Fee: 0.14 EUR/min from the German fixed phone network and up to 0.42EUR/min from mobile phone.

Service Time: Monday to Friday, 9:00 AM to 6:00 PM, GMT+1 or GMT+2 (Daylight Saving Time in Germany)  
\*Except bank holidays in Hesse

**Australia & New Zealand**  
Tel: AU 1300 87 5465  
NZ 0800 87 5465  
E-mail: [support@tp-link.com.au](mailto:support@tp-link.com.au)  
Service time: 24hrs, 7 days a week

**Turkey**  
Tel: 444 19 25 (Turkish Service)  
NZ 0800 87 5465  
E-mail: [support.tr@tp-link.com](mailto:support.tr@tp-link.com)  
Service time: 9:00 AM to 6:00 PM, 7days a week

**Italy**  
Tel: +39 02 66987799  
E-mail: [support.it@tp-link.com](mailto:support.it@tp-link.com)  
Service time: Monday to Friday, 9:00 AM to 6:00 PM

**Ukrainian**  
Tel: +380 (44) 590-51-14  
E-mail: [support.ua@tp-link.com](mailto:support.ua@tp-link.com)  
Service time: Monday to Friday, 14:00 PM to 22:00 PM

**Brazilian/Portuguese Service**  
Toll Free: 0800-770-4337  
E-mail: [supporte.br@tp-link.com](mailto:supporte.br@tp-link.com)  
Service time: Monday to Saturday 08:00 AM to 08:00 PM

**Indonesia**  
Tel: (+62) 021 6259 135  
E-mail: [support.id@tp-link.com](mailto:support.id@tp-link.com)  
Service time: Monday to Friday 9:00 -12:00; 13:00 -18:00

\*Except public holidays

**Switzerland**  
Tel: +41 (0)848 800998 (German Service)  
E-mail: [support.ch@tp-link.com](mailto:support.ch@tp-link.com)  
Fee: 4-8 Rp/min, depending on rate of different time

Service Time: Monday to Friday 9:00 AM to 6:00 PM, GMT+1 or GMT+2 (Daylight Saving Time)