




STEP 1 Insert panel into the gap in the part "Base". Choice of the panel depends on board you want to use for installation in StationBox™. The package of the StationBox™ includes 4 different types of panels dedicated for 4 different boards. Other panels can be ordered at your supplier.

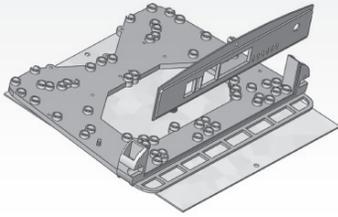


STEP 2 Insert Spacers into appropriate holes on the part "Base". Amount of Spacers and its location depend on the type of board you want to install.

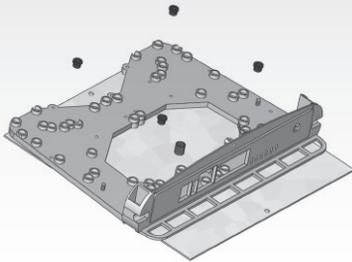


STEP 3 Place the board of your device into holes on the front side of part "Base" and on appropriate positions considering the Spacers.

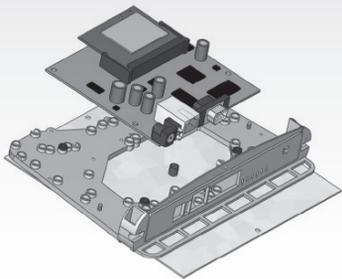


STEP 4 Screw the board of your device by using applied screws. Amount of the screws depends on amount of the Spacers that are used for your board.




STEP 5 Insert Lower part into "Base" according to the picture.

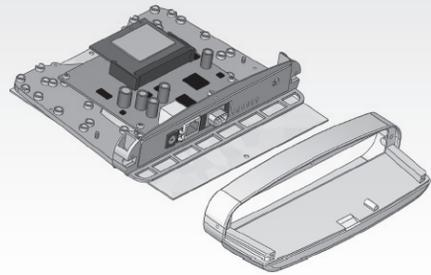


STEP 6 Fix the Lower part by using 3 applied screws.

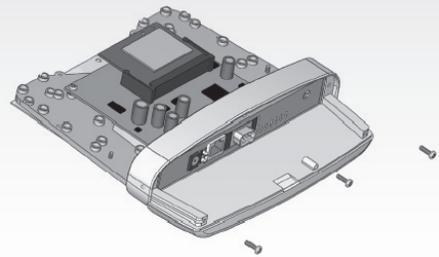


STEP 7 Attach antenna using 2 screws at the upper part of antenna (using free holes), according to the picture. Then, connect the pigtail to the radio.




STEP 8 Whole entity fix by using 2 screws according to the picture.

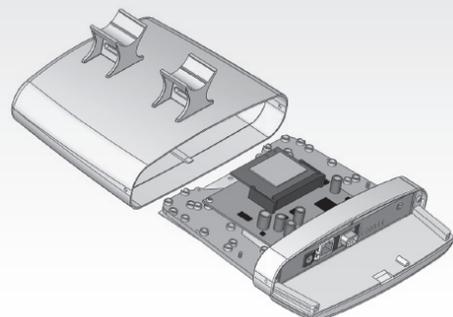


STEP 9 Whole entity fix by using 2 screws according to the picture.

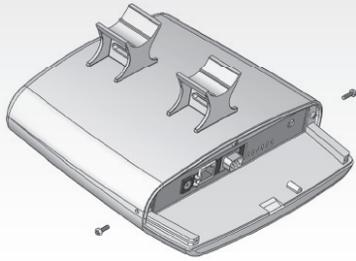


STEP 10 The StationBox™ is completed now and you can close it with Removable cover (before placing the Removable cover you can connect appropriate cables to your PCB).

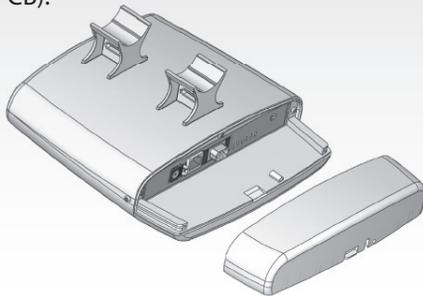

MOUNTING OPTIONS

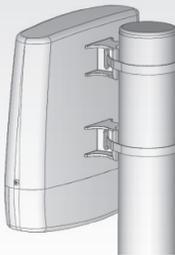

The StationBox™ can be installed on the mass or console by using applied Cable ties.

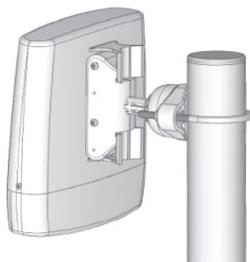

The Stationbox™ can be installed on the mass, console or wall by using our NanoBracket™

Note: NanoBracket™ is sold separately.
www.nanobacket.info

Installation manual

Installation manual

The packaging includes following components:

- | | | |
|---|--|---|
| <ul style="list-style-type: none">• Top cover – 1pc• Lower part – 1pc• Removable cover – 1pc• Base – 1pc• Panels – 4 pcs• Spacers:<ul style="list-style-type: none">small spacers – 8 pcsbig spacers – 10 pcs | <ul style="list-style-type: none">• Screws:<ul style="list-style-type: none">2,9 x 22mm – 8 pcs2,9 x 9,5mm – 13 pcs• Cable ties 300 x 7,8 mm – 2 pcs• Appropriate antenna (only in case you bought StationBox™ with integrated antenna) | <p>Complete list of available antennas and more details about StationBox™ outdoor enclosure you can find at:
www.stationbox.info</p> |
|---|--|---|

Product of RF Elements, s.r.o. Made in China.
www.rfelements.com

RF ELEMENTS™



STATION  BOX™