

Wireless N Router TL-WR741ND



Boost data transfer rate up to 150Mbps when working with 11N devices

QoS enables smooth IPTV streaming and lag-free online gaming

QSS, Quick Secure Setup at a push of button




Description:

The TL-WR741ND is a combined wired/wireless network connection device designed specifically for small business, office and home networking requirements. It integrates the functions of Wireless Access Point, firewall, 4-port Switch and NAT-Router. It provides a simple, very fast, pleasing way to access internet or Ethernet without cables for work or fun. It is 802.11b & g compatible based on 802.11n technology and gives you 802.11n performance up to 150Mbps at an even more affordable price, giving you a high quality experience when video streaming, using Internet calls, or online gaming wirelessly from anywhere in your entire home.

Specifications:

| | |
|-------------------------|--|
| Standards | IEEE 802.11g |
| | IEEE 802.11b |
| | With some n features |
| Interface | 4 10/100M Auto-Sensing RJ45 Port(Auto MDI/MDIX) |
| | 1 10/100M Auto-Sensing RJ45 Port(Auto MDI/MDIX) |
| Wireless Signal Rates | Up to 150Mbps |
| Frequency Range | 2.4-2.4835GHz |
| Wireless Transmit Power | 20dBm(MAX)(EIRP-total effective radiated power is 20 |
| | dBm(100mW), antenna gain will not influence wireless transmit power) |
| Modulation Technology | DBPSK, DQPSK, CCK, OFDM, 16-QAM, 64-QAM |
| | 130M: -68dBm@10% PER |
| | 54M: -68dBm@10% PER |
| | 11M: -85dBm@8% PER |
| Receiver Sensitivity | 6M: -88dBm@10% PER |
| | 1M: -90dBm@8% PER |
| | |
| Antenna | 5dBi Detachable Omni Directional Antenna |
| Software Functions | NAT, Dos Firewall, DHCP |
| Power Supply Unit | Input: Localized to Country of Sale |
| | Output: 9V DC / 0.6 A switching PSU |
| Operating temperature | 0°C~40°C (32°F~104°F) |
| Storage temperature | -40°C~70°C (-40°F~158°F) |
| Relative humidity | 10% ~ 90%, Non-Condensing |
| Storage Humidity | 5%~95%, Non-Condensing |
| Dimensions | 6.9 x 4.6 x 1.3 in. (174 x 118 x 33 mm) |

Diagram:

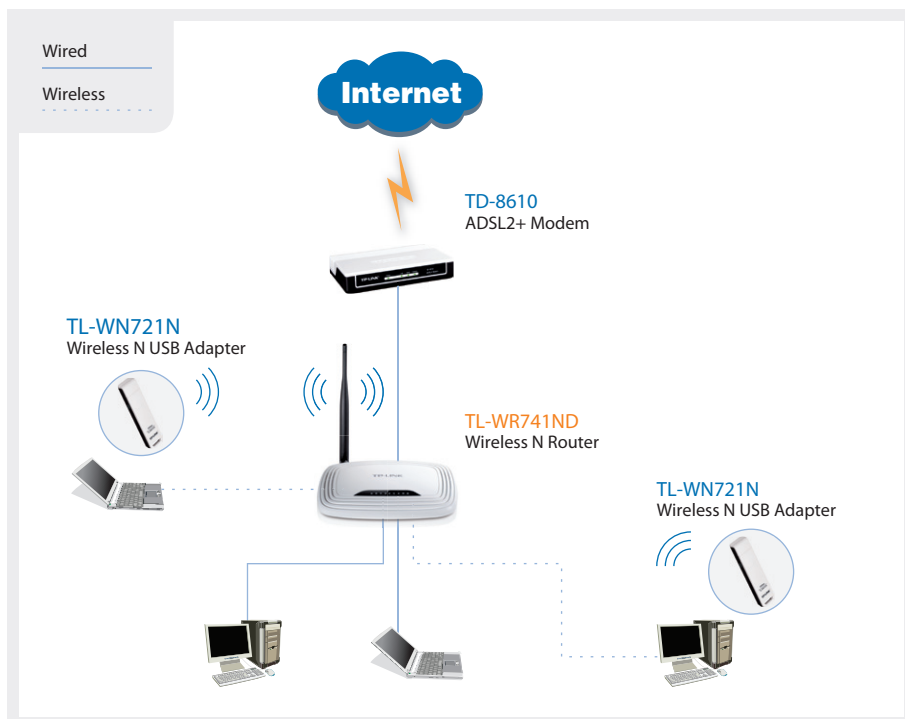

Features:

- Wireless speed up to 150Mbps when connected to 11n device
- CCA™ improves wireless performance while automatically avoiding channel conflict
- For home and office use, supports PPPoE, Dynamic IP, and static IP broadband access and various dialing requirements
- Supports UPnP, DDNS, static routing, VPN Pass-through, and data forwarding
- Built-in firewall features IP, MAC, URL-filtering which flexibly controls online access and time
- Supports QSS (Quick Secure Setup), provides 64/128/152-bit WEP encryption, supports WPA/WPA2, WPA-PSK/WPA2-PSK authentication
- QoS assures the quality of multimedia streaming
- SPI and NAT firewall protect end-user devices from potential attacks from across the Internet
- Supports web-site firmware upgrade, remote and local web management
- Seamlessly compatible with 802.11b and 802.11g devices
- Detachable Antenna (reverse SMA connector)

Package:

- Wireless N router TL-WR741ND
- 5dBi Detachable Antenna
- Power supply unit (localized to country of sale)
- Resource CD
- Quick Setup Guide

Related Products:

- ADSL2+ Modem TD-8610
- Wireless N USB Adapter TL-WN721N
- 10/100M Desktop Switch TL-SF1008D
- 5dBi Omni desktop antenna TL-ANT2405C

Specifications are subject to change without notice. TP-LINK is a registered trademark of TP-LINK Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-LINK Technologies Co., Ltd.